
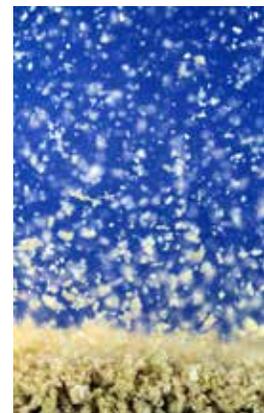


# RM-10<sup>®</sup> Flocculants Cut Energy Costs at Plating Company

A plating plant that produced between 400 and 800 gallons of wastewater per week was using an evaporator to manage the surplus wastewater generated from two rinse baths, one with chrome and one with cadmium. When CETCO was contacted, the team identified RM-10 flocculant was best suited for their wastewater.

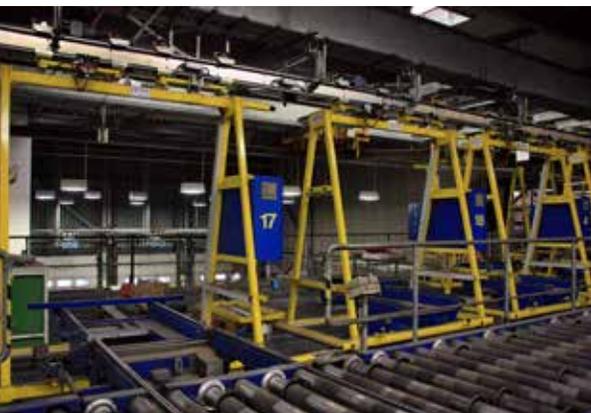

### PROJECT DETAILS

Plating Plant

### LOCATION

North America

### PRODUCTS USED

RM-10<sup>®</sup> Flocculant

### CHALLENGE:

A plating plant that produced between 400 and 800 gallons of wastewater per week was using an evaporator to manage the surplus wastewater generated from two rinse baths, one with chrome and one with cadmium. A significant increase in the volume of wastewater being processed meant that the existing evaporator simply could not cope. While the purchase of a new evaporator would have been a potential solution, it was ruled out since that expense had not been included in the budget. Furthermore, the company was not prepared to incur the additional costs from using a larger volume evaporator. For these reasons the plant decided to look for alternative solutions.

### CETCO SOLUTION:

CETCO was contacted to remove the chrome and cadmium from the wastewater. CETCO identified which RM-10<sup>®</sup> flocculant formula was best suited for their wastewater after a sample was sent to the lab. The specific RM-10 flocculant formula provided an ideal alternative to a new evaporator.

RM-10 flocculant can be added to wastewater streams of varying blends and applications. Its primary purpose is to encapsulate hazardous components into a safe, non-leachable sludge that can be easily and safely disposed.

# RM-10<sup>®</sup> Flocculants Cut Energy Costs at Plating Company

The application of RM-10 flocculant was adopted by the plant in conjunction with a TT 200 wastewater treatment system that operates in union with the flocculant. This treatment regime has enabled the plating company to reuse or release wastewater safely and efficiently. RM-10 flocculant worked in this case by converting the state of the chrome and cadmium for disposal once cyanide destruction had taken place.

**OUTCOME:**

With RM-10 flocculant, the plant now enjoys significant reductions in its energy costs by avoiding the need to operate its evaporator all week; it can operate its new treatment system when needed rather than on a continuous basis.

[cetco@mineralstech.com](mailto:cetco@mineralstech.com) | [cetco.com](http://cetco.com) | 800.527.9948

UPDATED: NOVEMBER 2019

© 2019 CETCO. IMPORTANT: The information contained herein supersedes all previous printed versions, and is believed to be accurate and reliable. For the most up-to-date information, please visit [www.cetco.com](http://www.cetco.com). CETCO accepts no responsibility for the results obtained through application of this product. CETCO reserves the right to update information without notice.

