

# SERICRON<sup>®</sup> talc

## Paint and Construction Grade Talcs

Specialty Minerals Inc. (SMI) SERICRON<sup>®</sup> talc products can be used in coatings and construction applications where the high brightness associated with the SMI TALCRON<sup>®</sup> talc products is not required. SERICRON<sup>®</sup> talc products are produced by Barretts Minerals Inc., from an extensive deposit of high quality Montana platy talc ore. This talc ore has good chemical resistance and in paint and coatings formulations, improves corrosion resistance, water permeability

and film integrity. SERICRON<sup>®</sup> talcs can also be used in construction products such as joint compound, adhesives, sealants, putties, caulks and other such areas where a platy particle improves spreadability and application properties while controlling overall formulation cost. This versatile line of platy talcs is available in a full range of particle sizes to satisfy formulation and application requirements.



### Typical Properties

### SERICRON<sup>®</sup> Paint & Construction Grade Talc


	<b>6M</b>	<b>5M</b>	<b>4M</b>	<b>3M</b>	<b>2M</b>
Dry Brightness (Hunter Y, Rd value)	84	84	84	82	80
Mesh Retention*	---	---	---	1.5	2.0%
Hegman Fineness	6	5	4	---	---
Median Particle Size (microns)	2	3.2	4	8	8
Oil Absorption	39	36	30	24	22
Bulk/Tapped Density (lb/ft <sup>3</sup> )	12/33	16/35	20/46	24/52	27/55
Bulk/Tapped Density (g/cc)	0.19/0.53	0.16/0.56	0.33/0.74	0.38/0.83	0.43/0.88
pH	8.8	8.8	8.8	8.8	8.8
Bulking Value	23.3	23.3	23.3	23.3	23.3
Specific Gravity	2.8	2.8	2.8	2.8	2.8
Percent Moisture		<0.5%	<0.5%	<0.5%	<0.5%

\*Mesh Retention: 3M @ +325, 2M @ +200

### Chemical Composition (typical)

Magnesium	as MgO	30%
Silicon	as SiO <sub>2</sub>	55%
Aluminum	as Al <sub>2</sub> O <sub>3</sub>	3%
Calcium	as CaO	2%
Iron	as Fe <sub>2</sub> O <sub>3</sub>	<2%
Loss of Ignition	L.O.I.	8.5%

### Particle Distribution Curve CUMULATIVE MASS % FINER vs. DIAMETER

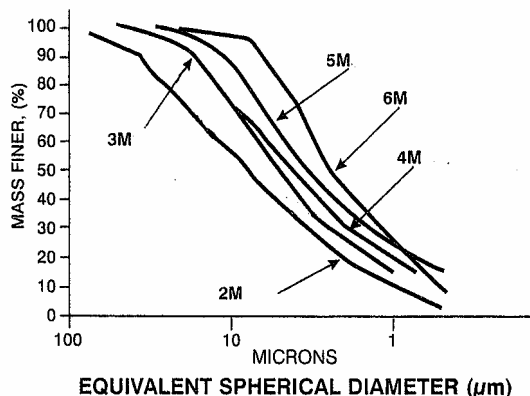

All products are sold on the understanding that the user is solely responsible for determining their suitability for the intended use. All information given and recommendations made herein are based upon our research and are believed to be accurate, but no guarantee, either expressed or implied, is made with respect thereto or with respect to the infringement of any patent. SMI MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OF THE PRODUCTS DESCRIBED THEREIN. Inconsistent terms and conditions contained in Buyer's purchase order shall not be binding on SMI/BMI unless reflected in writing signed by SMI/BMI's representative. This information is not to be copied, used in evidence, released for publication or public distribution without written permission from Specialty Minerals Inc./Barretts Minerals Inc.

### Sales Office

Bethlehem, PA • (800) 801-1031  
www.mineralstech.com

SP&S00 4/2004

SERICRON<sup>®</sup> and TALCRON<sup>®</sup> are registered trademark of Minerals Technologies Inc. or its subsidiaries.

©Specialty Minerals Inc.