

FEATURES

- ▶ Narrow Particle Size Distribution
- ▶ Ultrafine Particle Size
- ▶ Process Controlled Top Size
- ▶ Surface Treated for Improved Dispersion

BENEFITS

Sealants & Inks

- ▶ Builds true thixotropic, shear-thinning structure in polymer systems
- ▶ Improved sag and slump
- ▶ Improved yield value, viscosity and thixotropy
- ▶ Improved adhesion

Polymer & Rubber

- ▶ Improved impact strength
- ▶ Higher gloss vs other fillers
- ▶ Minimize impact modifier loading
- ▶ Reduced process aid, lower total formulation cost

CALOFORT®

Precipitated Calcium Carbonate

Product Description

CALOFORT® ultrafine precipitated calcium carbonate (pcc) products are manufactured at the Specialty Minerals Lifford plant in the UK. These stearate coated white microcrystalline powders are characterized by high surface area, controlled particle shape, and high whiteness and are commonly used to modify rheology and reinforce in a variety of polymer systems.

CALOFORT SM provides slump resistance and viscosity control in Polyurethane, Polysulphide, and other polymer based sealant systems.

CALOFORT SV is used in PVC plastisols, Modified Silicone Polymer, Silicone, 2K Polyurethane, Polysulphide and other sealant formulations where higher sag and slump resistance, high strength and elongation, and high viscosity control are required. CALOFORT SV is also used in high quality printing inks to improve rheological properties.

CALOFORT S provides improved properties to a number of applications including:

- Rigid PVC; to increase impact strength, improve surface gloss and whiteness
- Plasticised PVC; providing excellent scuff resistance and improved surface properties
- Rubbers; for reinforcement properties and hot tear strength
- Solvent based Paints and Primers; as an antissettling filler
- Polyester Moulding Compounds; as a reinforcing filler
- Plastic Compounds; as a carrier for additives

Typical Physical Properties

	CALOFORT SM	CALOFORT SV	CALOFORT S
+45µ BS sieve residue (%)	0.3 max	0.3 max	0.3 max
Loss on Drying (@105°C for 2hrs.)	0.5 max	0.5 max	1.0 max
Coating Level, %	2.7-3.3	2.7-3.3	2.7-3.3
Surface Area (m ² /gram)	19-25	19-25	17-25
Brightness (Hunter Y)	97.6	97.6	97.6
Yield stress in DOP/desiccant system dPa	500-1100	1500-2200	--
Morphology	Prismatic	Prismatic	Prismatic
Primary Particle Size (nm)	70	70	70
Bulk Density (g/ml)	0.25	0.20	0.25
Tap Density (g/ml)	0.38	0.30	0.38

** Values listed are typical, not to be considered as specifications.

▶ GCC

▶ Talc

▶ Specialty PCC




Specialty
MINERALS

CALOFORT®

Precipitated Calcium Carbonate

Chemical Properties

Calcium Carbonate	98%
Moisture	<0.5%

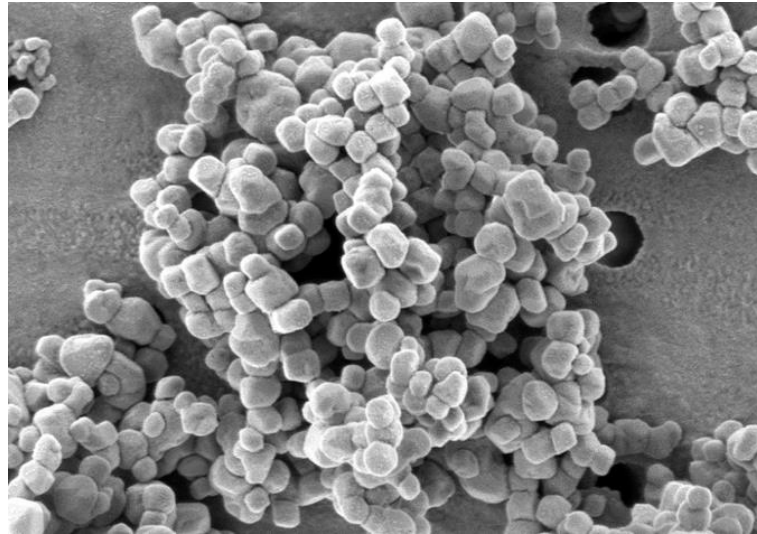

SHIPPING INFORMATION

CALOFORT precipitated calcium carbonate ships from Birmingham, UK.

Product is available in 25kg bags, big bags (FIBC), and bulk.

For availability and minimum order quantity, contact customer service.

SALES OFFICES

Birmingham, UK
0044-121-252-4500

Bethlehem, PA, USA
001-800-801-1031

www.mineralstech.com

All products are sold on the understanding that the user is solely responsible for determining their suitability for the intended use. All information given and recommendations made herein are based upon our research and are believed to be accurate, but no guarantee, either expressed or implied, is made with respect thereto or with respect to the infringement of any patent. SMI MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OF THE PRODUCTS DESCRIBED HEREIN. Inconsistent terms and conditions contained in Buyer's purchase order shall not be binding on SMI/BMI unless reflected in writing signed by SMI/BMI's representative. This information is not to be copied, used in evidence, released for publication or public distribution without written permission from Specialty Minerals Inc./Barretts Minerals Inc.

The Minerals Technologies Logo, Specialty Minerals Logo, and CALOFORT are registered trademarks of Minerals Technologies Inc. or its subsidiaries.



Specialty
MINERALS