

FEATURES

- ▶ Narrow particle size distribution
- ▶ Nano particle size
- ▶ Process controlled top size
- ▶ Meets requirements of BP, EP, and USP

BENEFITS

- ▶ Minimize impact modifier loading
- ▶ Reduced process aid loading for overall reduced cost

CALOFORT® U

Precipitated Calcium Carbonate

Product Description

CALOFORT® U precipitated calcium carbonate (PCC) is manufactured at Specialty Minerals Lifford plant in the UK. CALOFORT® U is a white microcrystalline powder, characterized by high surface area, controlled particle shape and high whiteness. CALOFORT® U is suitable for both industrial and consumer applications.

INDUSTRIAL APPLICATIONS:

The high surface area and rheological structure-building ability of CALOFORT® U PCC makes it a versatile functional filler. Its hydrophilic nature makes it particularly suitable for use in water based systems though it is also compatible with many polymer and solvent-based systems.

CALOFORT® U PCC is used alongside the coated CALOFORT® grades, to control rheology in sealant systems such as those based on butyl or polysulphide polymer when high shear dispersion is available.

The regular particle shape of CALOFORT® U PCC makes it suitable for use in gravure inks where its low abrasion is an added benefit compared to other fillers.

Other industrial uses of CALOFORT® U include:

- Rubber reinforcement
- Carrier for catalysts, peroxides, fragrances
- Detackification of thin film natural rubber
- Powder flow control additive

CONSUMER APPLICATIONS:

CALOFORT® U meets the requirements of the British, European and United States Pharmacopoeia and is an excellent source of calcium in foods and beverages and as an excipient in pharmaceutical applications. Specifications and required properties should be clearly communicated at time of order placement to ensure all testing is met.

Typical Physical Properties*

+45µ BS sieve residue	<0.1%
Loss on Drying (at time of testing, @200°C for 4hrs.)	1.0 % max
Surface Area (m ² /gram)	17-29
Dry Brightness (Minolta Y)	98.5
Morphology	Prismatic
Primary Particle Size (nm) Bulk	70
Density (g/ml)	0.25
Tap Density (g/ml)	0.42


Chemical Properties

Calcium Carbonate	98%
Moisture	<0.5%

*Values listed are typical, not to be considered as specifications of the product.

CALOFORT® U

Precipitated Calcium Carbonate

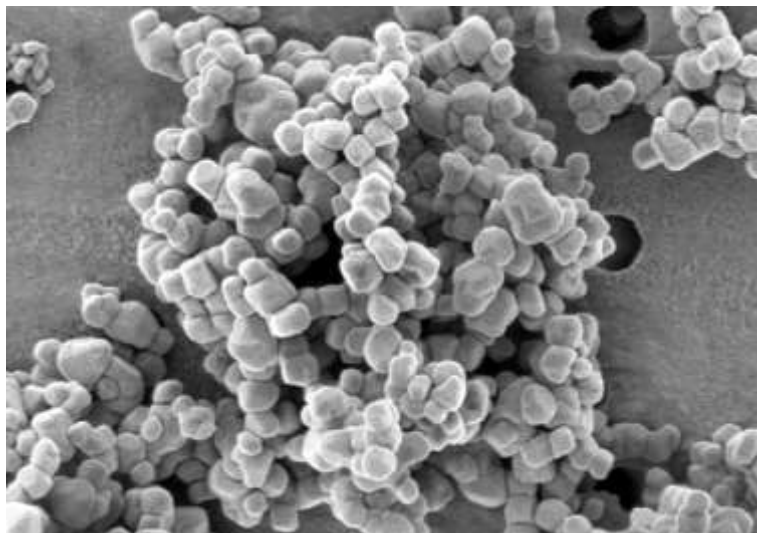

SHIPPING INFORMATION

CALOFORT U precipitated calcium carbonate ships from Birmingham, UK.

Product is available in 25kg. bags, big bags (FIBC), and bulk.

For availability and minimum order quantity, contact customer service.

SALES OFFICES

Lifford, UK
0044-121-252-4500

Bethlehem, PA
001-800-801-1031

www.mineralstech.com

The information provided may not be used for any purpose other than to identify prospective products consumers may be interested in purchasing. All products are sold on the understanding that the user is solely responsible for determining their suitability for the intended use. All information given and recommendations made herein are based upon our research and are believed to be accurate, but no guarantee, either expressed or implied, is made with respect thereto or with respect to the infringement of any patent. SMI MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OF THE PRODUCTS DESCRIBED HEREIN. Inconsistent terms and conditions contained in Buyer's purchase order shall not be binding on SMI unless reflected in writing signed by SMI's representative.